


# Silicon Power Schottky Diode

 $V_{RRM} = 20\text{ V} - 40\text{ V}$ 
 $I_F = 25\text{ A}$ 
**Features**

- High Surge Capability
- Types up to 40V  $V_{RRM}$
- Not ESD Sensitive

**DO-4 Package**
**Note:**

1. Standard polarity: Stud is cathode.
2. Reverse polarity (R): Stud is anode.
3. Stud is base.


**Maximum ratings, at  $T_j = 25\text{ }^\circ\text{C}$ , unless otherwise specified ("R" devices have leads reversed)**





Parameter	Symbol	Conditions	1N5829 (R)	1N5830 (R)	1N5831 (R)	Unit
Repetitive peak reverse voltage	$V_{RRM}$		20	25	35	V
RMS reverse voltage	$V_{RMS}$		14	17	25	V
DC blocking voltage	$V_{DC}$		20	25	35	V
Continuous forward current	$I_F$	$T_C \leq 100\text{ }^\circ\text{C}$	25	25	25	A
Surge non-repetitive forward current, Half Sine Wave	$I_{F,SM}$	$T_C = 25\text{ }^\circ\text{C}$ , $t_p = 8.3\text{ ms}$	800	800	800	A
Operating temperature	$T_j$		-55 to 150	-55 to 150	-55 to 150	$^\circ\text{C}$
Storage temperature	$T_{stg}$		-55 to 150	-55 to 150	-55 to 150	$^\circ\text{C}$

**Electrical characteristics, at  $T_j = 25\text{ }^\circ\text{C}$ , unless otherwise specified**

Parameter	Symbol	Conditions	1N5829 (R)	1N5830 (R)	1N5831 (R)	Unit
Diode forward voltage	$V_F$	$I_F = 25\text{ A}$ , $T_j = 25\text{ }^\circ\text{C}$	0.58	0.58	0.58	V
Reverse current	$I_R$	$V_R = 20\text{ V}$ , $T_j = 25\text{ }^\circ\text{C}$	2	2	2	mA
		$V_R = 20\text{ V}$ , $T_j = 125\text{ }^\circ\text{C}$	250	250	250	


**Thermal characteristics**

Thermal resistance, junction - case	$R_{thJC}$		1.8	1.8	1.8	$^\circ\text{C/W}$
-------------------------------------	------------	--	-----	-----	-----	--------------------

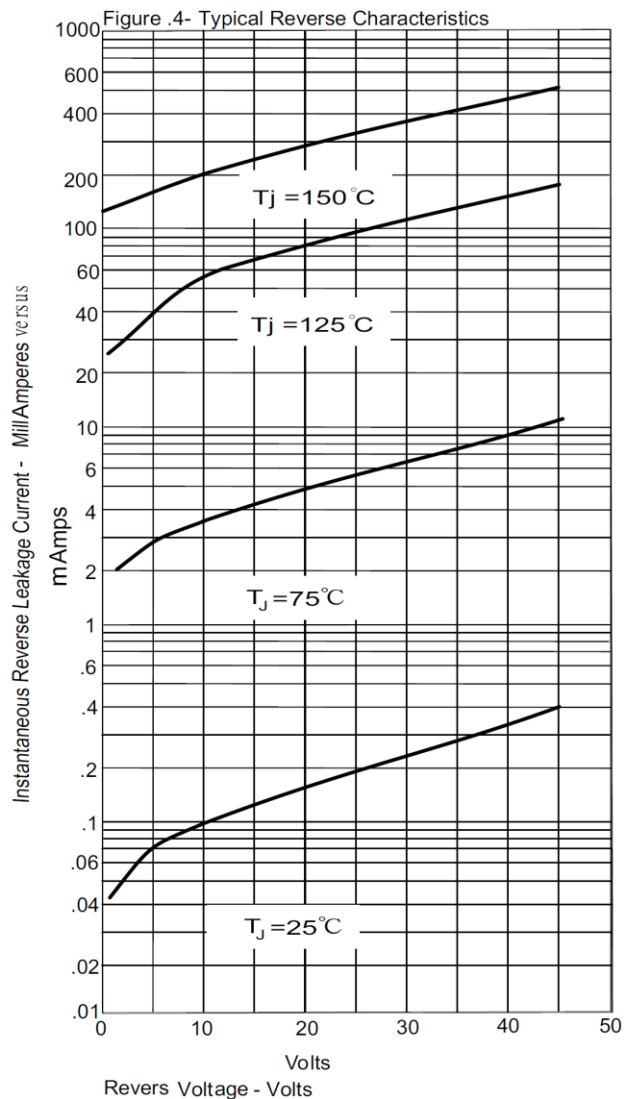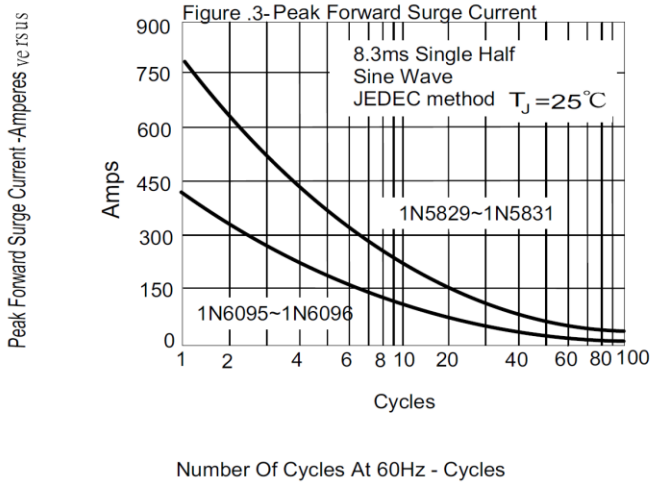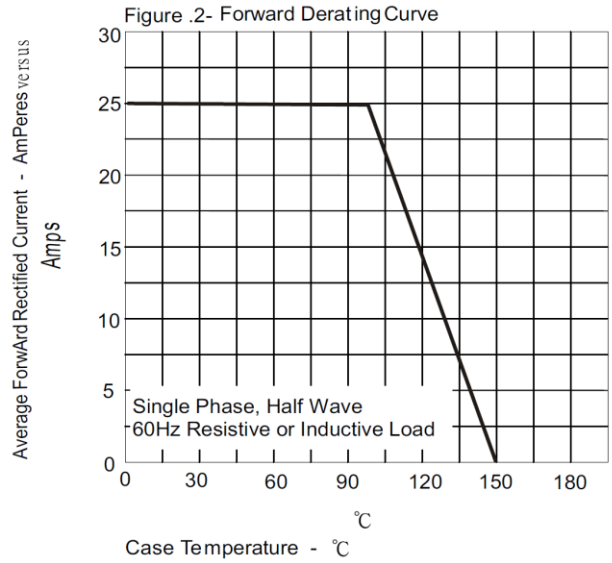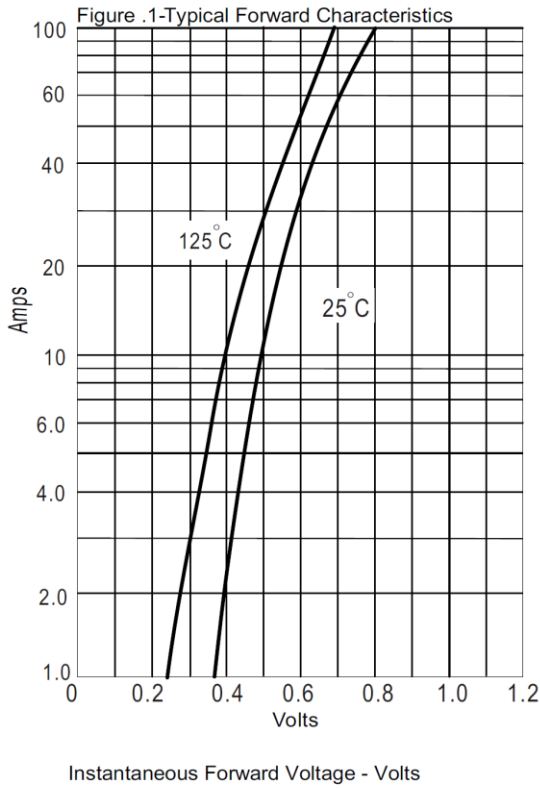

**Package dimensions and terminal configuration**

Product is marked with part number and terminal configuration.

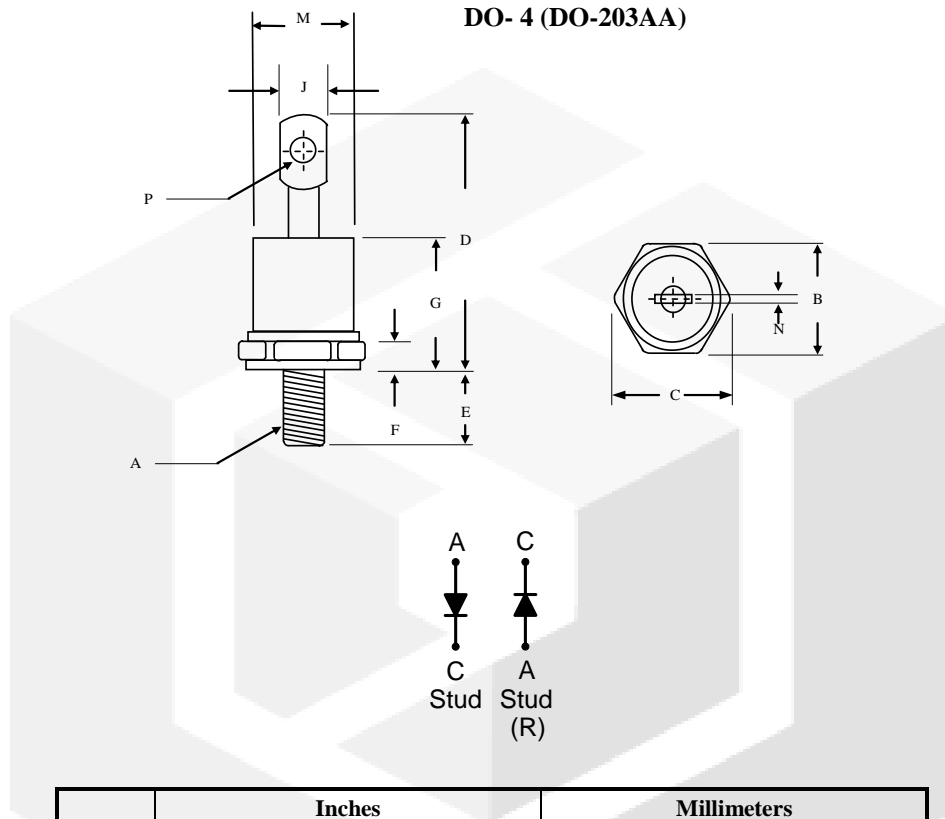

	Inches		Millimeters	
	Min	Max	Min	Max
A	10-32 UNF			
B	0.424	0.437	10.77	11.10
C	-----	0.505	-----	12.82
D	-----	0.800	-----	20.30
E	0.453	0.492	11.50	12.50
F	0.114	0.140	2.90	3.50
G	-----	0.405	-----	10.29
J	-----	0.216	-----	5.50
M	-----	φ0.302	-----	φ7.68
N	0.031	0.045	0.80	1.15
P	0.070	0.79	1.80	2.00